



■ GENERAL INFORMATION


Testing pump ZL-RP-50 is a precision tool for testing installation tightness using water or oil as testing liquid, a maximum testing pressure of 50 bar.

SPECIFICATIONS

Name	PressureTesting pump
Code	ZL-RP-50
Dimensions LW/H	49X16X16 cm
Wight	7.64 kg
Tank volume	12L
Outlet connection	R 1/2"
Testing fluid	water, oil
Maximum temperature	50°C-120°F
Maximum pressure	50 bar-5MPa

■ PUMP PARTS


1. Pressure hose
2. Locking hook
3. Handle
4. V1: Shut-off valve
5. V2: Purge valve
6. Tank

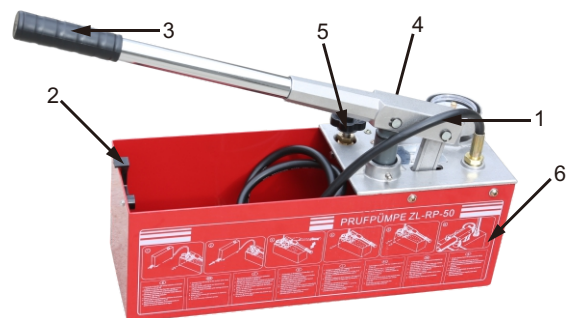

■ Maintenance

Keep the tank and pump system clean. The suction pipe is supplied with filter to prevent dirt entering the pump pressure system. If the filter should clog, remove the dirt and clean it with water. Grease the piston periodically with water repellent grease.

■ General Safety

 **CAUTION!** Please, Carefully read and follow these datasheet prior to starting the testing pump.

We recommend that is should not be modified, nor used for other purposes. The pump may not be used if pressure hoses or any other parts are flawed or broken. Use only the liquids specified for the tests.